

## STACK TUMBLE DRYERS

**DX**  
RANGE

**DX13/13** **DX20/20**

2X13KG  
2X30LB

2X20KG  
2X45LB



### FEATURES


- Double capacity on the same footprint
- Controls:
  - Dual Digital Control or OPL Micro
  - Coin operated version: XQ-Control
- Gas, Electrical and Steam heating (DX13/13)
- Gas heating (DX20/20)
- Large door opening for easy loading and unloading (DX 13/13 Ø 57cm, DX 20/20 Ø 68cm)
- Galvanized drum
- Axial airflow
- Large lint filter

### OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Residual moisture control Sensodry+® (only with Full OPL Micro):
  - lower energy and utility costs
  - lower linen replacement costs
- SafeTech™ Fire Suppression System
- Reversing drum



SUITABLE FOR  
LAUNDROMATS




STACKABLE  
UNIT




EASY  
OPERATION

TYPE		DX13/13	DX20/20
<b>CAPACITY</b>			
Capacity	kg	2x13	2x20
Drum volume	l	2x300	2x420
Drum diameter	mm	Ø 762	Ø 838
<b>AIRFLOW</b>			
Airflow	l/s	380	570
<b>DRYING AVERAGE</b>			
Gas heating	g/min	294	385
Electric heating	g/min	258	-
<b>MOTOR</b>			
Fan	kW	2x0,4	2x0,4
Drive	kW	2x0,2	2x0,4
<b>GAS HEATING</b>			
Energy	kW	42,8	55,6
Energy	kBTU/h	146	190
Electrical connection		1x100-120V/50-60Hz, 1x200-240V/50-60Hz 3x200-240V/50-60Hz, 3x440-480V/50-60Hz, 3x380-415V/50-60Hz	
Gas connection (one manifold)	NPT	½"	½"
<b>STEAM HEATING</b>			
High pressure 6,9 bar	kW kBTU/h	32,5 111	- -
Electrical connection		1x100-120V/50-60Hz, 1x200-240V/50-60Hz 3x200-240V/50-60Hz, 3x440-480V/50-60Hz 3x380-415V/50-60Hz	
Steam connection	NPT	¾"	-
<b>ELECTRICAL HEATING</b>			
Energy	kW	21	-
Electrical connection		3x200-208V/50-60Hz, 3x230-240V/50-60Hz 3x380V/50-60Hz, 3x400-415V/50-60Hz 3x440V/50-60Hz, 3x460-480V/50-60Hz	
<b>EXHAUST</b>	Ø /mm	1x200	1x250
<b>DIMENSIONS</b>			
Size HxWxD	mm	1940x800x1090	2065x875x1235
Net weight (E, G, S)	kg	300, 260, 275	- , 320, -
<b>TRANSPORT DATA</b>			
Packed (foil) HxWxD	mm	2030x830x1190	2160x900x1370
Gross weight (foil E, G, S)	kg	300, 270, 290	- , 340, -
Packed (crate) HxWxD	mm	2210x900x1270	2210x1020x1520
Gross weight (crate E, G, S)	kg	360, 330, 350	- , 420, -

Side DX 13/13 20/20

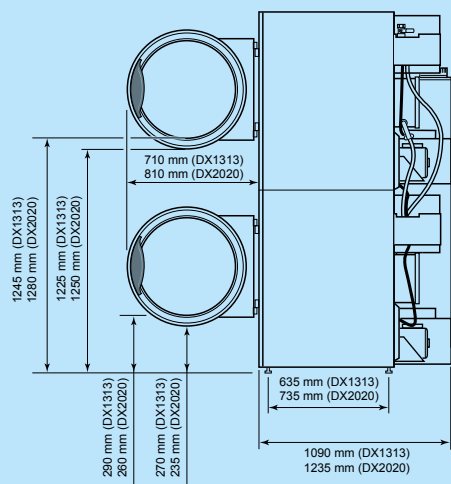

Side DX 13/13 20/20

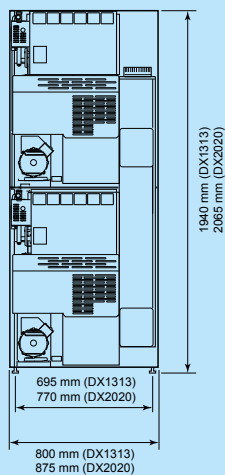

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

Primus by Alliance Laundry Systems

